

**TATA MOTORS
GENSETS**

EXPRESS GENSETS

#HindustanKaGlobalGenset

CPCB IV+
Range

TRIED | TESTED | TRUSTED – POWER WITH CARE



+91-9212757575, 9810885060



expeng@generatorbazar.com



www.generatorbazar.in

SALIENT FEATURES

- **Built for High Temperature:** All The Silent Generators of Rishabh Are Designed to withstand the ambient temperature of 45 degree Celsius, though the radiators used are able to withstand ambient temperature of 50 degree Celsius.
- **Sturdy:** TATA Engines are most sturdy as they are originally designed for Commercial vehicle application & can go upto 5000 RPM.
- **Lowest Fuel Consumption :** Rishabh Generators powered by TATA engines have the lowest fuel consumption as more available power of the engine allows optimal fuel flow & there by the generator runs smoothly & efficiently.
- **Widest Service Network:** In India We at Rishabh | TATA Give you the most widespread Service network, with over 1800 Service dealers across India, we have the most extensive service network.
- **Highest block loading capacity (50% - 60%)** across range which is best in Industry.
- **Annual maintenance contract** through our responsive-service network. Extended warranty Option available.

WORLD CLASS GENSETS

MADE IN INDIA FOR THE WORLD

Our world class Gensets come with:

India's	Diesel Engine	TATA
World's	AC Generator	STAMFORD/MECCALTE
India's	Steel for Acoustics	TATA STEEL
World's	Genset Controllers	DEEP SEA
India's	Foam for Acoustics	SheelaFoam
India's	Lead Acid Battery	EXIDE
India's	A.V.M Pads	POLYBOND
World's	Switchgear	Schneider Electric
World's	Paint	AkzoNobel
World Class Self Starter & Dynamo	Lucas TVS	BOSCH
World Class Radiator	TATA TOYO	



EVERY COMPONENT MATTERS

TATA have used the Best Components of The Industry to give you a World Class Product.

Below You May Find A Sneak Peek on Some of The Major Components.

ACOUSTIC ENCLOSURE

Our Silent Gensets use India's No 1 Steel in our gensets by **TATA STEEL**

- Aesthetically designed, weather and sound resistant enclosure.
- Designed for Ease of Access and Serviceability.
- Acoustic Enclosures come with UV resistant powder coating which can withstand extreme weather conditions.
- Smallest Footprint giving an edge to optimize your valuable space.
- Ease of handling with appropriately located Center/ Single lifting arrangement & Forklift Slots for easy shifting.
- Inbuilt Silencer up-to 75kVA, above 75kVA Silencer Comes with Bird Protection.
- Practically located fuel filling point.
- Rishabh Silent Gensets Come with India's No.1 Sheela Foam (makers of Sleepwell Mattress).
- Certified for stringent and latest MoEF / CPCB IV+ norms of less than 75 dB at 1 meter.
- Super Silent models for special applications which have 68-70 db sound level at 1 meter in open field conditions.
- The Foam used in enclosure is fire retardant.

GENSET CONTROLLER / SWITCHGEAR EQUIPMENT

Our Generators come with World class controllers from Deep sea

- Fault recognition by name unlike other controllers which display fault code.
- Microprocessor based.
- Brilliant & bigger best in class LCD screen.
- Lowest battery consumption in ideal condition.
- Manual Breaker operation with tactile buttons on front panel.
- This controller comes with IP 65 protection against water seepage.
- World class Dgset monitoring & protection features.
- Available with Automatic & Manual Functions on demand.
- Rishabh Generators come with World No. 1 Switch gear from Schneider / L&T



Disclaimer: All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them.


TECHNICAL SPECIFICATIONS - ZD SERIES																
DG SET	DG Set Model	RT-20^	RT-25	RT-30	RT-35	RT-40	RT-45	RT-50	RT-62.5	RT-75	RT-82.5*	RT-83	RT-100	RTS-125	RT-125	
	Rating (kVA)	20	25	30	35	40	45	50	62.5	75	82.5*	82.5	100	125	125	
	Rating (kW)	16	20	24	28	32	36	40	50	60	66	66	80	100	100	
ACOUSTIC ENCLOSURE	Starting System	12V DC														
	Battery (Ah)	90										100				
	Canopy Size : LxBxH (mm)	2350 x 1030 x 1425							2850 x 1100x 1550			3200 x 1200 x 1800				
	Weight (Kg)	950	1000	1020	1030	1040	1450	1500	1520	1580	1610	1750	1800	1850	2050	
	Fuel Tank Capacity (Ltrs)	130						180				250				
	Foam Thickness on Doors (mm)	40							50				75			
	Density of Foam for Sound Insulation	32							38				50			
	Steel Make & Thickness in Acoustic	TATA Steel Base 3 mm Rest of Canopy 1.6 mm														
ENGINE	Engine Model Family	497SP	497SPTC						497TC				697TC			
	Engine Make															
	Engine Power (Bhp)	32.5	40.2	48.2	56.3	56.3	56.3	75.7	90	99.8	99.8	120	125.3	156	156	
	Rated Speed (RPM)	1500														
	No. of Cylinders	4										6				
	Bore (mm)	97	97	97	97	97	97	97	97	97	97	97	97	97	97	
	Stroke (mm)	100	100	100	100	100	100	128	128	128	128	128	128	128	128	
	Total Displacement (CC)	2960							3800				5700			
	Lube oil Sump Capacity (Ltrs)	7							10				15			
	Total Coolant Capacity (Ltrs)	13							14				18			
	Oil Change Period	500 Hrs Or 6 Months Which Ever Is Earlier														
	Compression Ratio	17.5 : 01														
	Aspiration	Natural	Turbo Charged													
	Cooling System	Water/Coolant														
	FIP	Inline Pump (Mico Bosch)											Rotary / Inline Pump	Rotary Pump (Mico Bosch)	Inline Pump (Mico Bosch)	
	Governing Type	Mech-A1 Governing											Electronic / Mech-A1 Governing	Electronic-A0 Governing	Mech-A1 Governing	
	ALTERNATOR	Emission Norms	CPCB-II Compliant													
Alternator Make		Stamford														
Type (PF)		Brushless, H Class Insulation (0.8)														
Frequency (Hz)		50/60														
Voltage (V)		230/415 110/230														
Amperes (A) @ 415 V		27	34	41	48	55	62	69	86	104	114	114	139	173	173	
CONTROLLER	Controller Make	WoodWard 1400			WoodWard 1400 / 600											
	Type	Microprocessor Based, LCD fault display screen, Auto start / Stop Features														
	Display Parameters	Run Time Hours, Current, Voltage, Engine RPM, Frequency, Engine Temperature & Oil Pressure, Battery V, Service Due Hours, kVA, PF, KW, KWH														
	Modes Available	Automatic/ Manual														
	DG Protections	Under/Over Frequency ,Current Unbalance, Over Speed, Overload, RWL, LLOP, HWT, LFL, Charging Alternator/V-belt, Emergency-Off, Service Due Fail To Start Fail To Stop														
	MCB/MCCB	SCHNEIDER / ABB														

* Stand By Rating ^ Coming Soon, Note: In View of continuous product upgradation & design changes, above specifications & dimensions are subject to change without prior notice

ENGINE

What makes **TATA** diesel engine India's no. 1 selling diesel engine?

- **Maximum Power:** The engines have the highest Break Horsepower (BHP) & Highest Cubic Capacity (CC) in its class.
- **Environment Friendly:** The engines confirm to CPCB-2 India norms having lowest emissions.
- **Global Engines of India:** **TATA** engines are truly world class & are used by DGSET Manufacturers Globally.

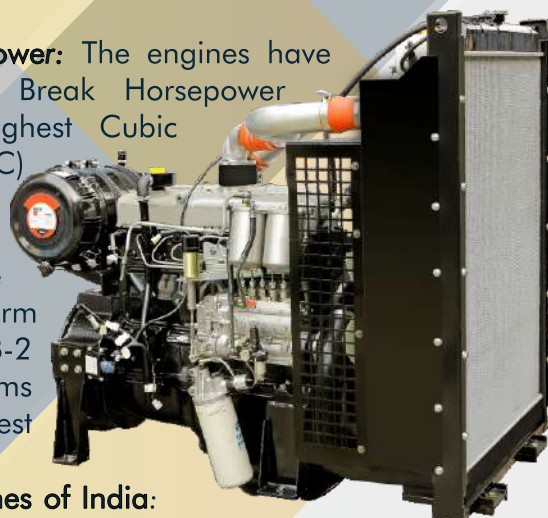

A/C GENERATOR / ALTERNATOR



Salient Features of **STAMFORD** Alternators By Cummins Generator Technologies Ltd:

- Best in Class Efficiency.
- 2/3 pitch winding alternator for better handling of harmonic and un-balanced load.
- Brushless Type and Class H insulation.
- Self-excited, self-regulated Single Bearing, Brushless & Continuous Duty.
- Protection Degree IP21/IP23.



Disclaimer: All product and company names are trademarks™ or registered® trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them.

TATA MOTORS EXPRESS GENSETS

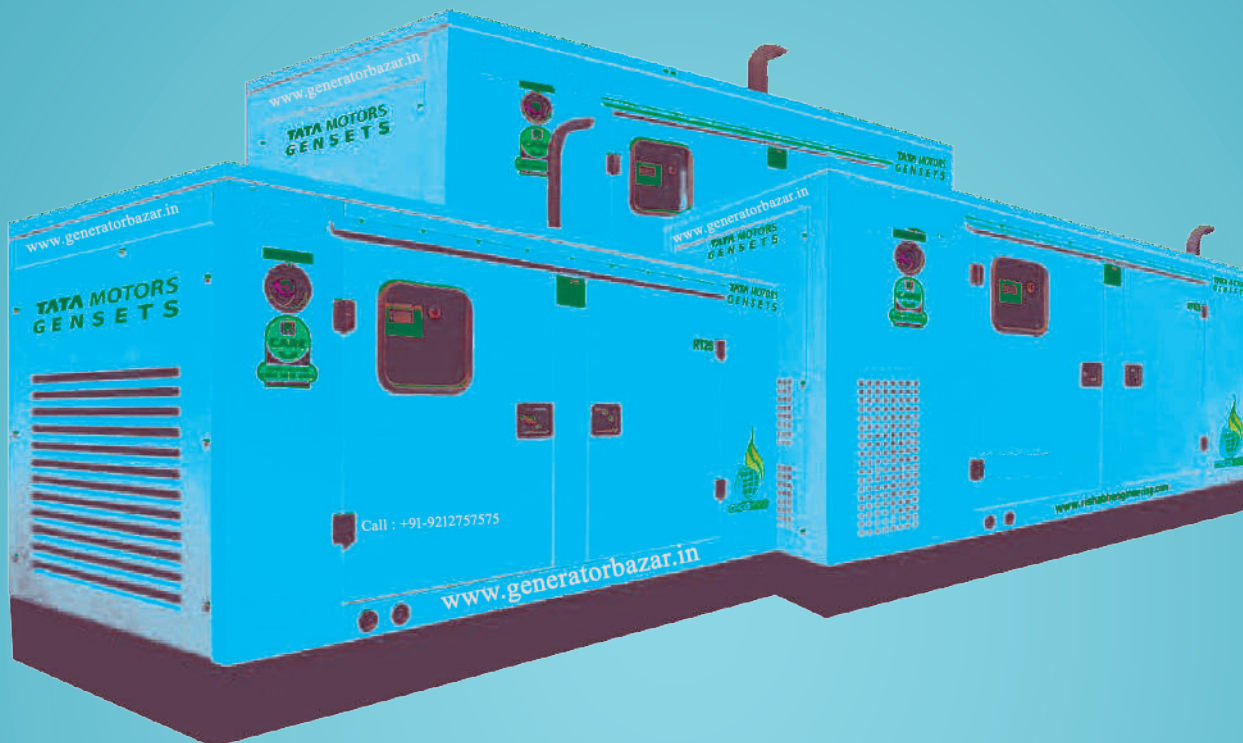

Manufactured By :
Authorized Goem | **TATA MOTORS**

EXPRESS ENGINEERS AND SPARES PRIVATE LIMITED

Email ID: expeng@generatorbazar.com Website: www.generatorbazar.in
Registered Office: 83, Rajdhani Nikunj, 94, I. P. Extension, Patpar Ganj, Delhi -110092, India Corporate Office: A-18
Rampuri, Surya Nagar Market, Ghaziabad, Uttar Pradesh - 201011
Tel: +91 0120 4100100, 4377077, 9212757575, 9810885060

Printed In India
PG/RT/052/S20-160/REC/JUNE/2024/2000

Use of the material for reproduction on the internet and world web is strictly prohibited without written permission from Rishabh Engineering Co.